



SMARTSENS


CMOS图像传感器

CMOS IMAGE SENSOR

SC350HGS 产品单页

SC350HGS Product Flyer

- 搭载SmartGS®-2技术的BSI架构全局快门图像传感器
A BSI Global Shutter image sensor with SmartGS®-2 technology
- 可流畅输出75fps 1:1画幅视频画面, 更适用于工业智能摄像头应用
Allowing industrial customers to shoot at 75fps in 1:1 imager mode
Features

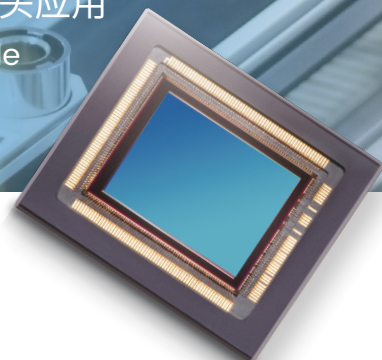

公司简介 | Company Profile

思特威(上海)电子科技股份有限公司(SmartSens Technology)是一家从事CMOS图像传感器芯片产品研发、设计和销售的高新技术企业,总部设立于中国上海,在多个城市及国家设有研发中心。

自成立以来,思特威始终专注于高端成像技术的创新与研发,凭借自身性能优势得到了众多客户的认可和青睐。作为致力于提供多场景应用、全性能覆盖的CMOS图像传感器产品企业,公司产品已覆盖了安防监控、机器视觉、智能车载电子、智能手机等多场景应用领域的全性能需求。

思特威将秉持“以前沿智能成像技术,让人们更好地看到和认知世界”的愿景,以客户需求为核心动力,持续推动前沿成像技术升级,拓展产品应用领域,与合作伙伴一起助推未来智能影像技术的深化发展。

SmartSens Technology (Shanghai) Co., Ltd. is a high-performance CMOS image sensor (CIS) chip design company. It is headquartered in Shanghai and has research centers in many cities around the world.

SmartSens has been dedicated to pushing forward the frontier of imaging technology and growing in popularity among customers since it was established. SmartSens' CMOS image sensors provide advanced imaging solutions for a broad range of areas such as surveillance, machine vision, automotive and cellphone cameras.

SmartSens is committed to continuous innovation of products and fueling growth in numerous industries by delivering a more comprehensive portfolio of image sensors.

顶点光电子商城

<https://www.vertex-icbuy.com/>

规格说明 | Specifications

项目 Item	参数 Parameters
Resolution	3MP
Pixel Array	1768H x 1768V
Pixel Size	4.2*4.2
Optical Format	2/3"
Max Frame Rate	1752 x 1752 @75fps
Output Interface	12/10/8-bit 1/2/4 Lane MIPI 12/10/8-bit 1/2/4 Lane LVDS
Output Format	raw
CRA	9°
Sensitivity	Mono: 14500mV/Lux-s
Dynamic Range	62dB
SNR	41dB
Operation Temperature	-30°C to +85°C
Best IQ Temperature	-20°C to +60°C
Power Supply	Analog = 2.8V±0.1V
	Digital = 1.5V±0.1V
	I/O = 1.8V±0.1V
Package	166-pin CLGA
Package Size	15 x 18 x 2.3±0.15mm

产品特性 | Features

- 搭载SmartGS[®]-2技术的BSI架构全局快门3MP图像传感器**
 3MP BSI Global Shutter Image Sensor with SmartGS[®]-2 Technology
- 可精准、清晰捕捉高速运动物体,适用于工业相机应用**
 Enabling the Capturing of Fast-Moving Objects without Distortion for Industrial Cameras
- 1:1画幅75fps视频输出,更适用于工业应用**
 Shooting at 75fps in 1:1 Imager Mode for Industrial Cameras
- 高感光度**
 High Sensitivity

应用场景 | Applications

- 智能工业相机**
 Smart Industrial Cameras
- 工业自动化应用**
 Industrial Automation Cameras
- 智能物流应用**
 Smart Logistics Cameras

顶点光电子商城
<https://www.vertex-icbuy.com/>



WeChat



LinkedIn

■ 上海办公室
 上海市闵行区田林路889号绿洲四期8号楼
 Building 8, Shanghai Business Park IV, No. 889 Tianlin Road,
 Minhang District, Shanghai
 Tel: 021-6485-3570

■ 深圳办公室
 深圳市龙岗区坂田街道雅宝路1号 星河WORLD B座2801室
 B2801, Building B, Galaxy WORLD, No.1 Yabao Road,
 Bantian Street, Longgang District, Shenzhen
 Tel: 0755-2373-9713

■ 北京办公室
 北京市经济技术开发区荣华南路2号大族广场T6座2201室
 Room 2201, Building T6, Dazhu Plaza, No.2, South Ronghua
 Road, Economic-Technological Development Area, Beijing
 Tel: 010-6786-3626

■ 香港办公室
 香港观塘鸿图道21号讯科中心10楼F室
 RM F, 10/F, INFOTECH CENTRE, 21 HUNG TO RD

■ 美国(圣何塞)
 加利福尼亚州圣何塞市史蒂文森克里克大道4340号280室
 4340 Stevens Creek Blvd, Suite 280, San Jose CA95129
 Tel: +1 408 981 6626

Website www.smartsensotech.com
 E-mail CS@smartsensotech.com