


# Two-dimensional PSD

S15534

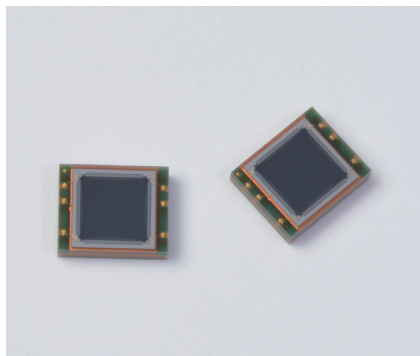

## Surface mount type, high-accuracy position sensitive detector

The S15534 is a surface mount type two-dimensional PSD with excellent position detection characteristics. It is smaller than the conventional S5990-01.

### Features

- COB type
- Excellent position detectability
- Small package: 7.21 × 5.96 × 1.5<sup>t</sup> mm
- Compatible with lead-free solder reflow

### Applications

- Light spot detection
- Pointing device
- Various types of position detection

### Options (sold separately)

- Signal processing circuit for 2-D PSD **C4674-01**

### Structure

| Parameter           | Symbol | Specification  | Unit |
|---------------------|--------|----------------|------|
| Photosensitive area | A      | 4 × 4          | mm   |
| Package             | -      | Glass epoxy    | -    |
| Window material     | -      | Silicone resin | -    |

### Absolute maximum ratings (Ta=25 °C)

| Parameter               | Symbol             | Value           | Unit |
|-------------------------|--------------------|-----------------|------|
| Reverse voltage         | V <sub>R</sub> max | 20              | V    |
| Operating temperature*1 | T <sub>opr</sub>   | -20 to +60      | °C   |
| Storage temperature*1   | T <sub>stg</sub>   | -20 to +80      | °C   |
| Soldering temperature   | T <sub>sol</sub>   | 260 (3 times)*2 | °C   |

\*1: No dew condensation. When there is a temperature difference between a product and the surrounding area in high humidity environments, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

\*2: Reflow soldering, JEDEC J-STD-020 MSL 3, see P.5


Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

### Electrical and optical characteristics (Ta=25 °C)

| Parameter                   | Symbol      | Condition   | Min. | Typ.        | Max.      | Unit       |
|-----------------------------|-------------|---|------|-------------|-----------|------------|
| Spectral response range     | $\lambda$   |   | -    | 380 to 1100 | -         | nm         |
| Peak sensitivity wavelength | $\lambda_p$ |   | -    | 980         | -         | nm         |
| Photosensitivity            | S           | $\lambda = \lambda_p$                                     | -    | 0.6         | -         | A/W        |
| Interelectrode resistance   | Rie         | Vb=0.1 V  | 5    | 7           | 15        | k $\Omega$ |
| Position detection error    | E           | $\lambda = 900$ nm, VR=5 V<br>light spot: $\phi 0.2$ mm*3 | -    | $\pm 70$    | $\pm 150$ | $\mu$ m    |
| Saturation photocurrent     | Ist         | $\lambda = 900$ nm, VR=5 V<br>RL=1 k $\Omega$             | -    | 500         | -         | $\mu$ A    |
| Dark current                | ID          | VR=5 V  | -    | 0.5         | 10        | nA         |
| Rise time                   | tr          | VR=5 V, RL=1 k $\Omega$<br>$\lambda = 900$ nm             | -    | 1           | -         | $\mu$ s    |
| Terminal capacitance        | Ct          | VR=5 V, f=10 kHz  | -    | 70          | -         | pF         |
| Position resolution         | $\Delta R$  | Io=1 $\mu$ A, B=1 kHz*3                                   | -    | 0.7         | -         | $\mu$ m    |


\*3: Specified within a circle that is 80% of the photosensitive area. Recommended light spot size:  $\phi 0.2$  mm or more

### Spectral response

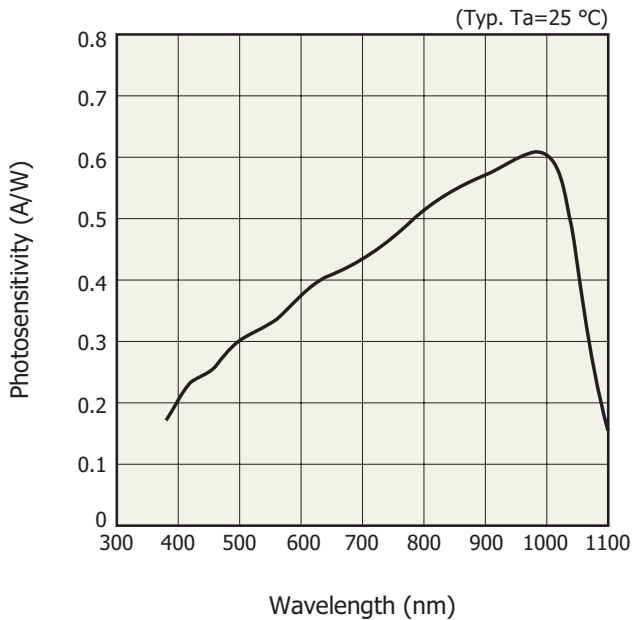


KPSDB0128EA

### Dark current vs. reverse voltage

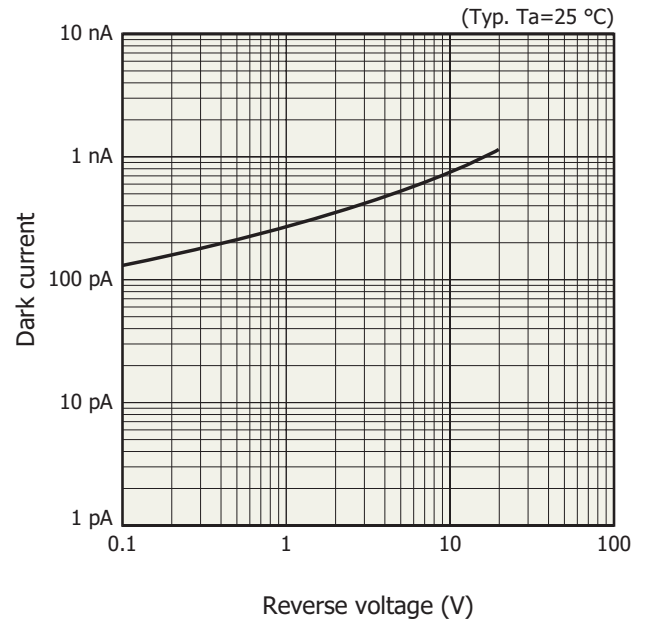


KPSDB0129EA

**Terminal capacitance vs. reverse voltage**

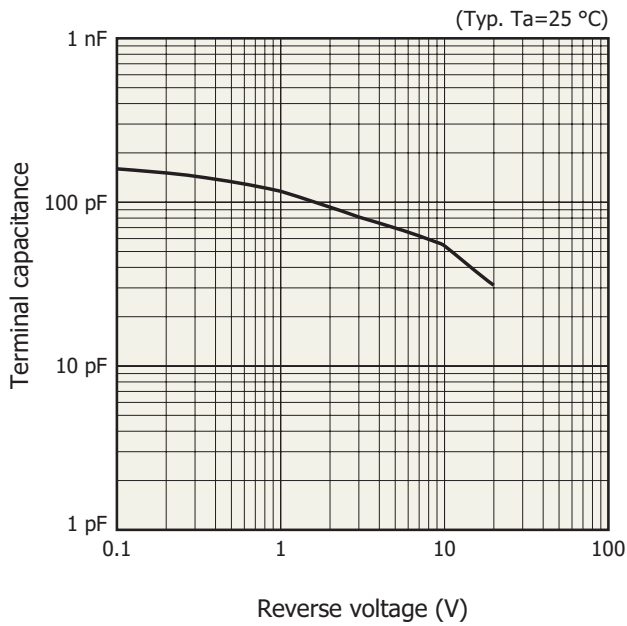

KPSDB0130EA

**Dimensional outline (unit: mm)**

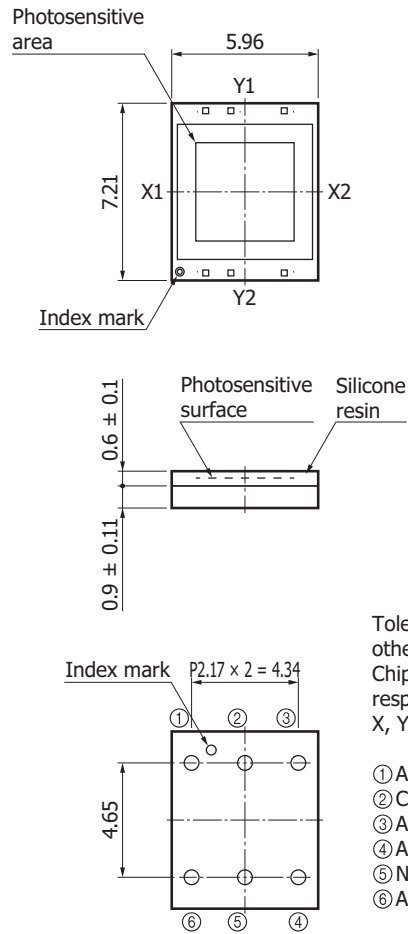

KPSDA0068EA


**Conversion formula**

$$\frac{(I_2 + I_3) - (I_1 + I_4)}{I_1 + I_2 + I_3 + I_4} = \frac{2x}{L}$$


$$\frac{(I_2 + I_4) - (I_1 + I_3)}{I_1 + I_2 + I_3 + I_4} = \frac{2y}{L}$$

x, y: Position coordinates of light spot: L=4.5 mm

**Recommended land pattern (unit: mm)**

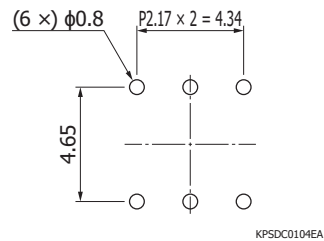

**Example of position detectability**  
 (Ta=25 °C, λ=900 nm, light spot size: φ0.2 mm)

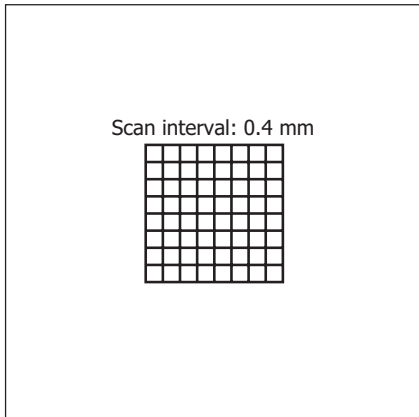


KPSDC0064EA

**Standard packing specifications**

■ Reel (conforms to JEITA ET-7200)

| Outer diameter | Hub diameter | Tape width | Material | Electrostatic characteristics |
|----------------|--------------|------------|----------|-------------------------------|
| φ330 mm        | φ100 mm      | 16 mm      | PS       | Conductive                    |

■ Embossed tape (unit: mm, material: PS, conductive)

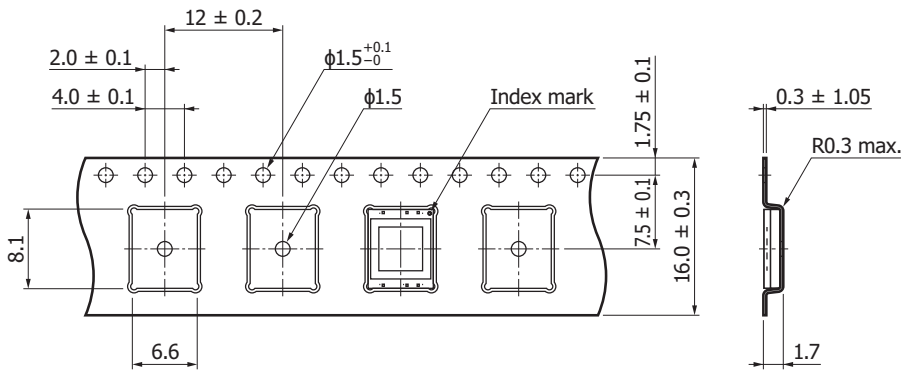

KPSDC0105EA


■ Packing quantity

500 pcs/reel

■ Packing state

Reel and desiccant in moisture-proof packaging (vacuum-sealed)

### Recommended reflow soldering conditions

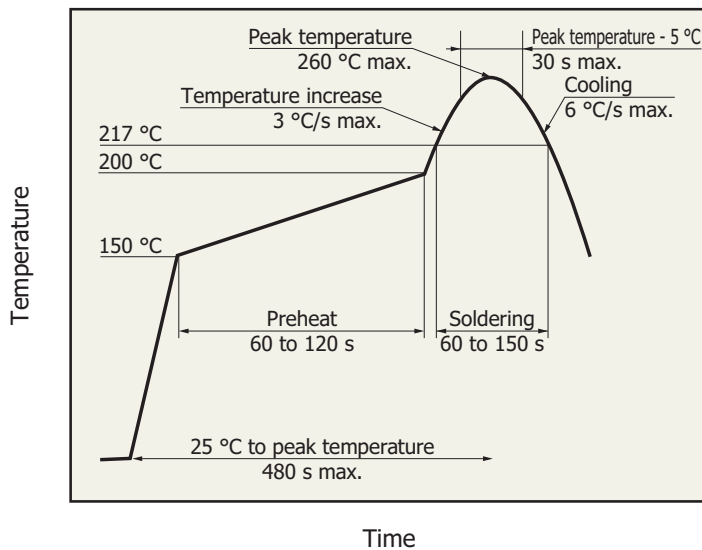

- After unpacking, store this device in an environment at a temperature range of 5 to 30 °C and a humidity below 60%, and perform reflow soldering on this device within 168 hours.
- The effect that the product receives during reflow soldering varies depending on the circuit board and reflow oven that are used. When you set reflow soldering conditions, check that problems do not occur in the product by testing out the conditions in advance.

KSPDB0419EA

### Baking

If more than 3 months have passed in the unopened state, or storage conditions are exceeded after opening the package, baking is required to remove moisture before reflow soldering. For the baking, refer to the precautions "Surface mount type products."

#### Recommended baking conditions

Temperature: 120 °C, 3 hours, up to twice

Note: Before setting the baking conditions, perform experiments to confirm that no problems occur with the product.

### Related information

[https://www.hamamatsu.com/sp/ssd/doc\\_en.html](https://www.hamamatsu.com/sp/ssd/doc_en.html)

#### Precautions

- Disclaimer
- Surface mount type products

#### Technical note

- PSD

Information described in this material is current as of February 2023.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

# HAMAMATSU

[www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81)53-434-3311, Fax: (81)53-434-5184

U.S.A.: HAMAMATSU CORPORATION: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218

Germany: HAMAMATSU PHOTONICS DEUTSCHLAND GMBH: Arzbergerstr. 10, 82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: HAMAMATSU PHOTONICS FRANCE S.A.R.L.: 19 Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: HAMAMATSU PHOTONICS UK LIMITED: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire, AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: HAMAMATSU PHOTONICS NORDEN AB: Torshamnsgatan 35, 16440 Kista, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: HAMAMATSU PHOTONICS ITALIA S.R.L.: Strada della Moia, 1 int. 6 20044 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

China: HAMAMATSU PHOTONICS (CHINA) CO., LTD.: 1201, Tower B, Jianning Center, 27 Dongsanhuan Bellu, Chaoyang District, 100020 Beijing, P.R. China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: [hpc@hamamatsu.com.cn](mailto:hpc@hamamatsu.com.cn)

Taiwan: HAMAMATSU PHOTONICS TAIWAN CO., LTD.: 8F-3, No.158, Section 2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: [info@hamamatsu.com.tw](mailto:info@hamamatsu.com.tw)